


PORTI-T

(Kiosk&Ticket)

Rev. 2.0

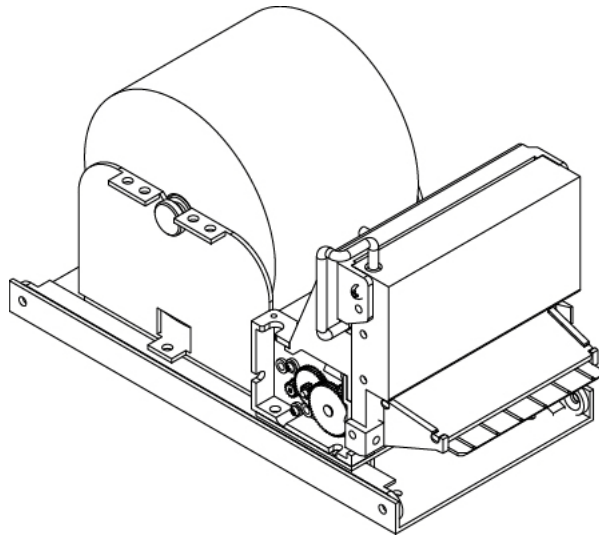

가 448 ,

3 501

: +82-2-2107-3700

: +82-2-2107-3707

<http://www.woosim.com>

|

PORTI-T Kiosk & Ticket

Copyright ©2007

|



|

가

|

!

U

U

(60mm/sec, MAX)

U

(203dpi : 8dots/mm)

U

UART(RS-232C or TTL), []

U

U

U

U CLAMSHELL

U

가

U

U

Microsoft Windows 98 / ME / 2000 / XP / VISTA / 7

U

: (XON/XOFF)

U



I

U

-
-

: -10°C ~ 50°C
: 10% ~ 90%

-
-
-
-
-
-
-

IrDA

U

-
-
-
-

| **Note**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

These equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception , which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

1.	7
1.1.	7
1.2	Part Number	7
1.2.	8
2.	9
2.1.	9
2.2.	10
2.2.1.	10
2.2.2.	10
2.3.	11
2.3.1.	Porti-T80.....	11
2.3.2.	Porti-T200.....	12
2.4.	13
2.5.	15
2.5.1.	15
2.5.1.	15
2.6.	16
2.6.1.	16
3.	17
3.1.	UART (RS-232C or TTL) 12V Cutter	17
3.2.	UART (RS-232C or TTL) 24V Cutter	18
3.3.	19
4	20
4.1.	20
4.2.	20
5.	21
5.1.	21
5.2	21

1.

1.1.

PORTI-T () () ()

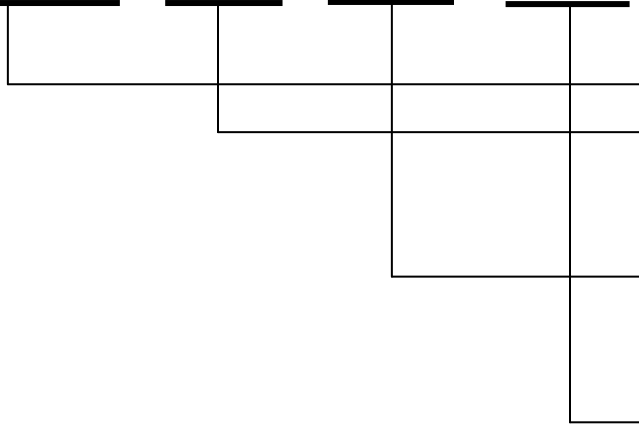


80: 60mm wide,80 Ø
 200: 60mm wide,200Ø

None: UART

P :

None : DC 12~24V

1.2 Part Number

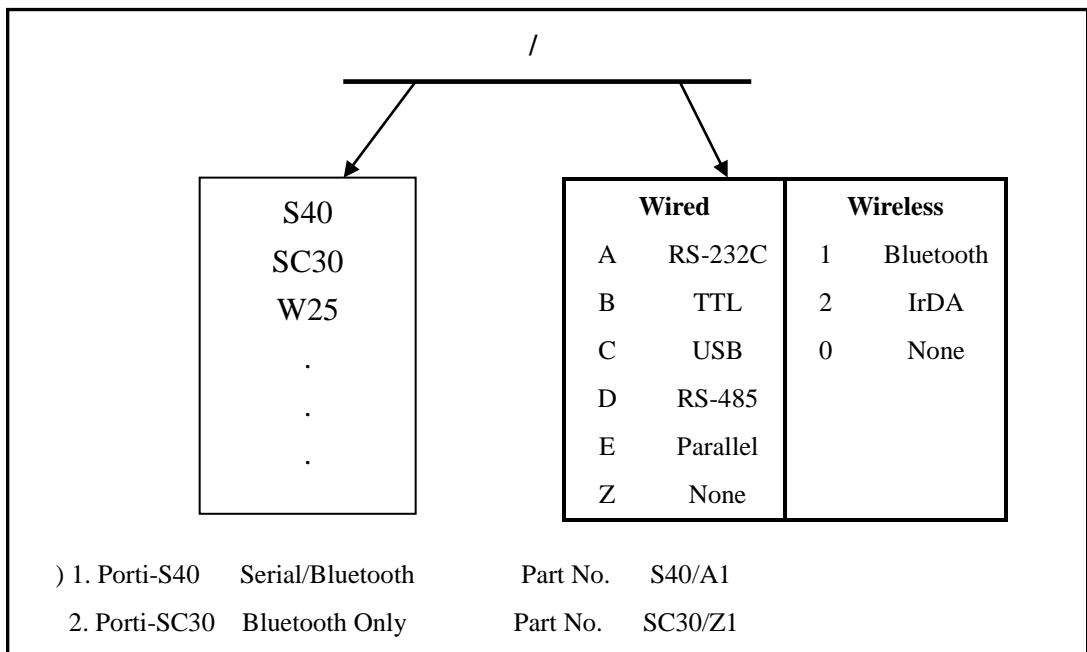


1.2.

		42cpl (MAX)
		: 9*24dots, 12*24dots : 16*24dots, [24*24dots]
		203dpi, 8dots/mm
		2-inch (48mm, 384dots)
		60mm / sec (MAX)
s		T80 : 190 * 87.5 * 103 mm [] T200 : 310 * 129 * 86mm
		820.5g () []
		UART(RS-232C or TTL) [] []
		PORTI-T80 : 60mm, 80ø [] PORTI-T200 : 60mm, 200ø
		1-dimension : Code128, Code39, I2/5, Code93 UPC, EAN, KAN, JAN, CODABAR 2-dimension : PDF417, QR Code, DATA Matrix
		MCU : 32bits RISC, FLASH : 4M bytes, RAM : 8M bytes
		1M bytes
		12~24VDC, Stand by 80mA and Max 3A
		Sliding mount assembly
		-10°C ~ 50°C () -10°C ~ 70°C ()
		30% - 80% () 10% - 90% ()
MCBF (Mean Cycle Between failure)	Mechanical	37,000,000 lines
	Head	50 Km

< Table 1 >

2.

2.1.


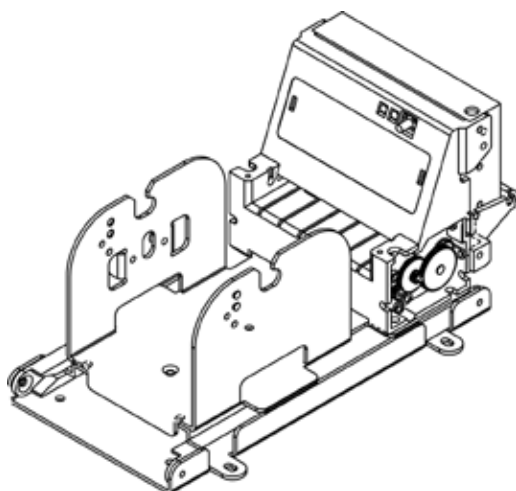


PORTI-T



2.2.


2.2.1.

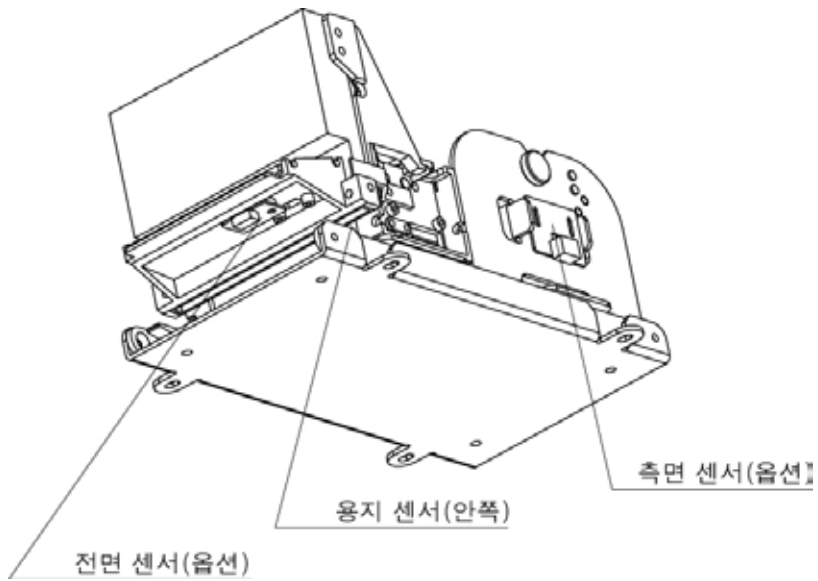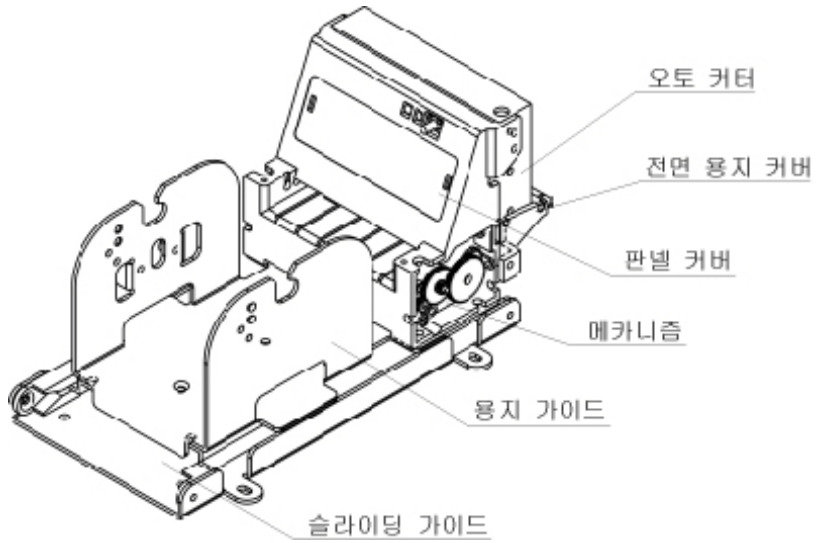


2.3.

2.3.1. Porti-T80


-

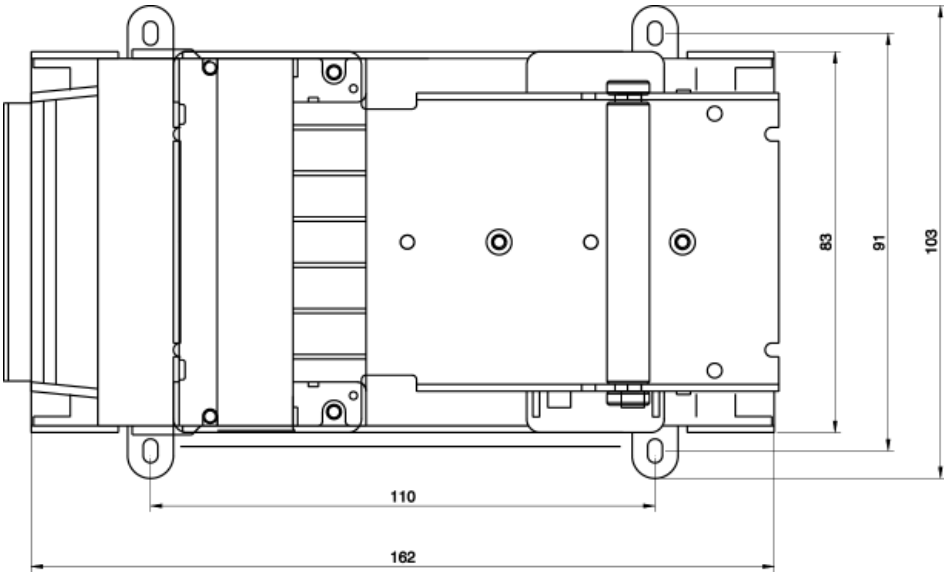

-

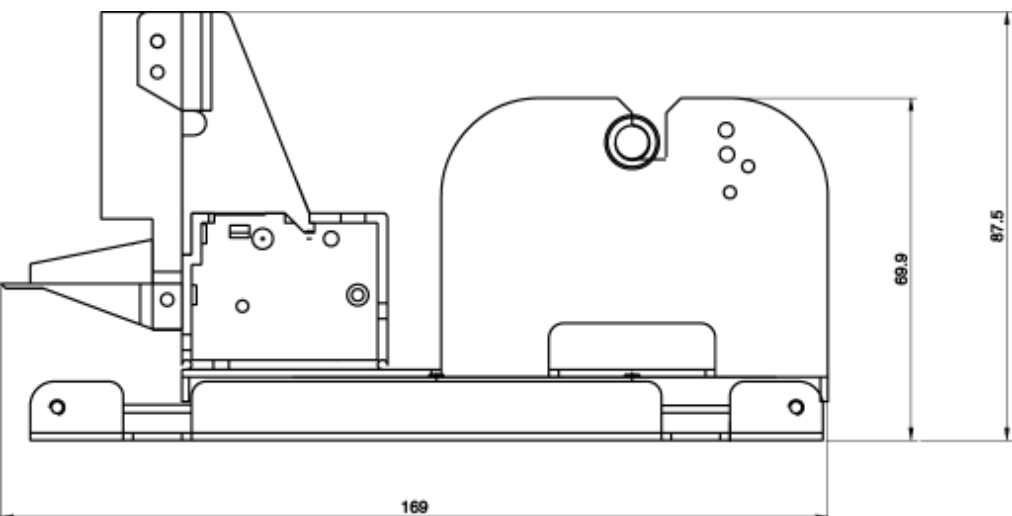

2.3.2. Porti-T200

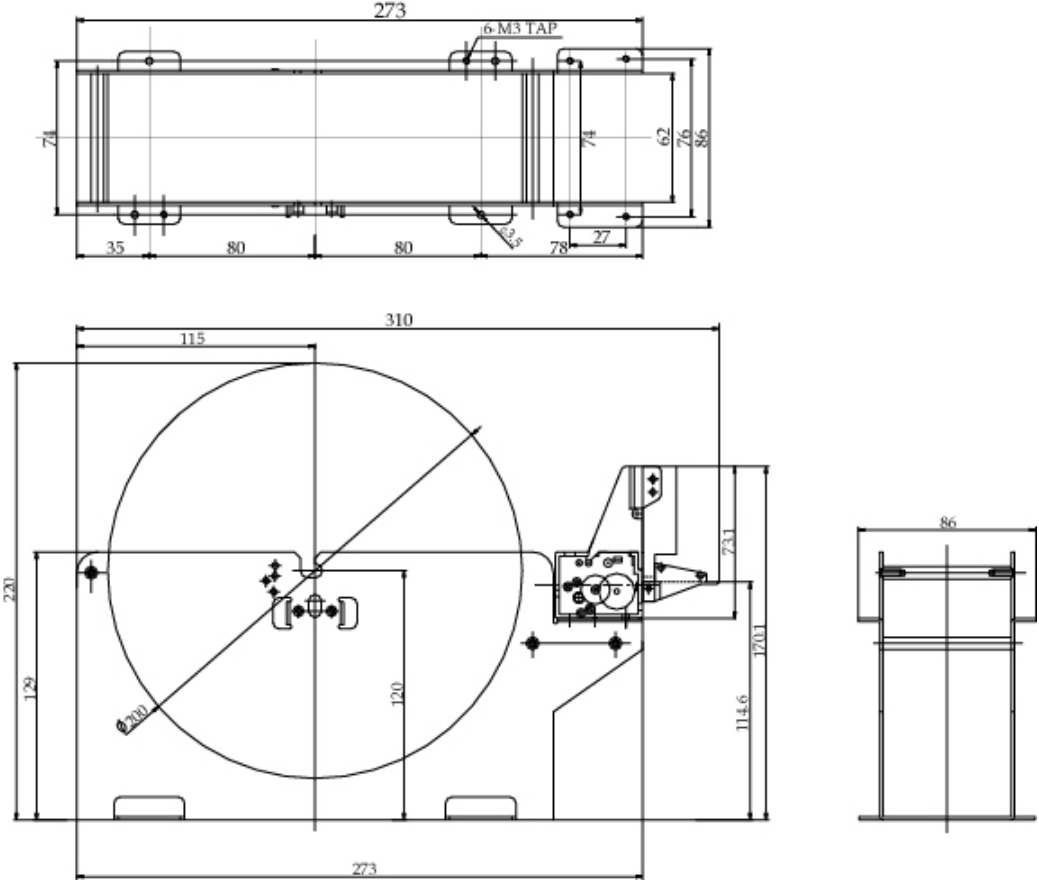


2.4.

：


(가 ,)

.)


1. 가 . 가
2. , .
3. , .

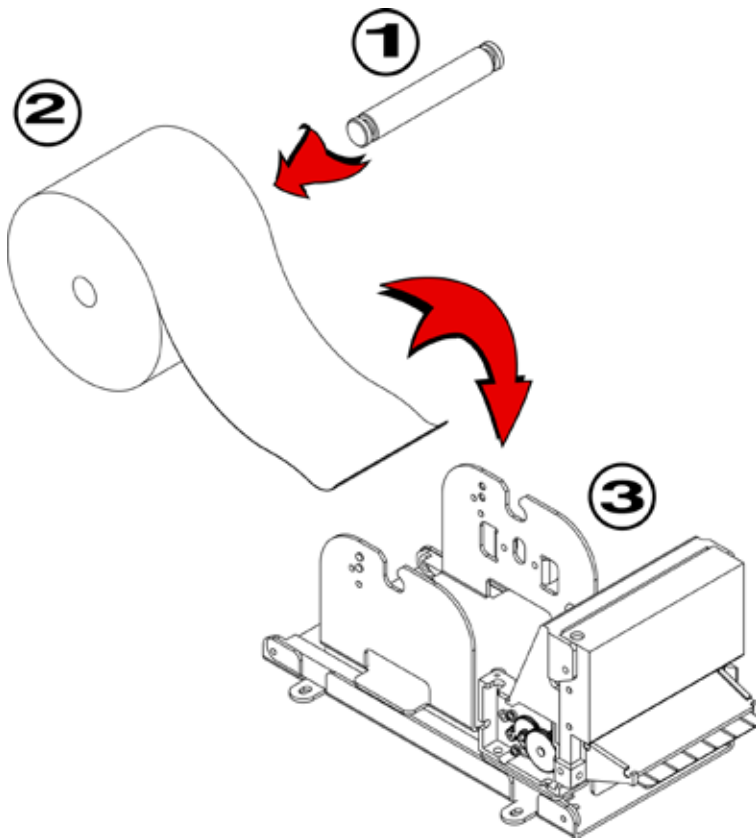

5,

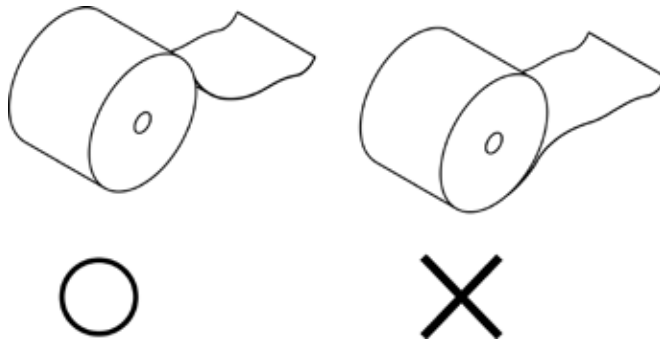


6,

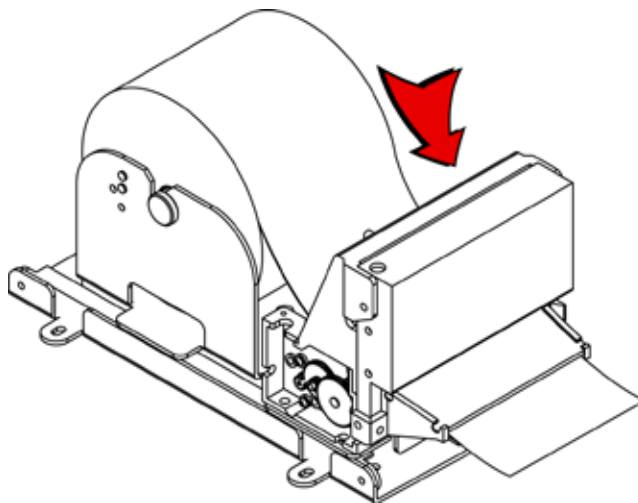


2.5.

2.5.1.

PORTI-T

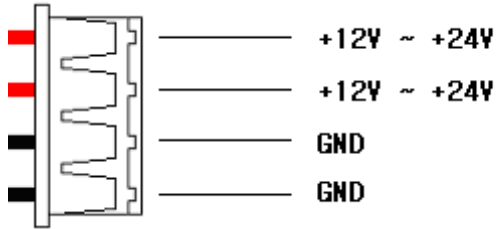

51004-0400 :

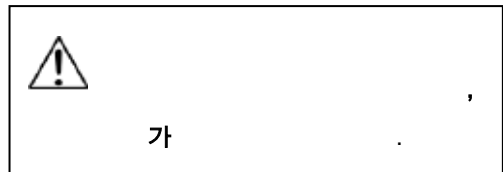


Applicable connector : MOLEX 53014-0410 or equivalent.

2.5.1.

: DC 12~24V / Max 3A

2.6.


2.6.1.

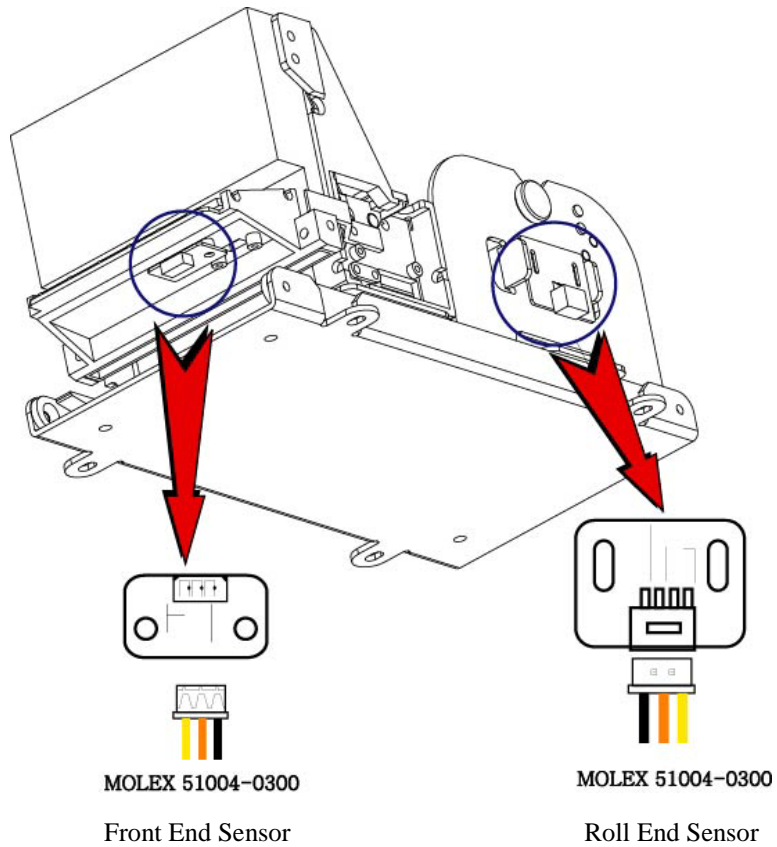

Applicable connector : MOLEX 53014-0310 or equivalent.

3.

3.1. UART (RS-232C or TTL) 12V Cutter

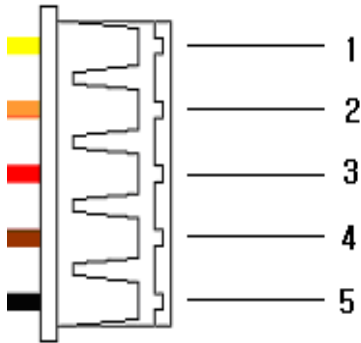


Porti-T(12V CUTTER) UART(RS-232C or TTL) 가 ,
5 .

1	TxD		Transmit Data
2	RxD		Receive Data
3		-	-
4		-	-
5	GND	-	Ground

< : 51004-0500 >

Applicable connector : MOLEX 53014-0510 or equivalent.

3.2. UART (RS-232C or TTL) 24V Cutter



Porti-T(24V CUTTER)

UART(RS-232C or TTL)

가 ,

3

<i>1</i>	TxD		Transmit Data
<i>2</i>	RxD		Receive Data
<i>3</i>	GND	-	Ground


< : 51004-03P >

Applicable connector : MOLEX 53014-03P or equivalent.

3.3.

PORTI-T

() 가 15

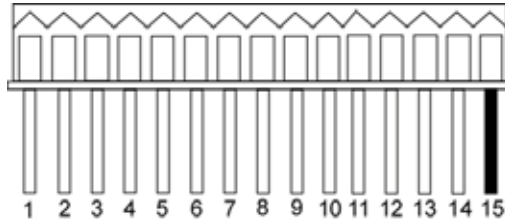

1	STB	
2	DATA BIT 0	
3	DATA BIT 1	-
4	DATA BIT 2	-
5	DATA BIT 3	-
6	DATA BIT 4	
7	DATA BIT 5	
8	DATA BIT 6	
9	DATA BIT 7	
10	ACK	
11	BUSY	
12	P/E	
13	ERR	
14	INIT	
15	GROUND	

< : 51021-1500 >

Applicable connector : MOLEX 53047-1510 or equivalent.

4

4.1.



U

- :

U

- :

- : 가 , 가 ,

4.2.

1.

2.

3.

4.

5.

가

5.

5.1.

- :
: 60mm
: $60 \pm 5 \mu\text{m}$
: $\text{Ø}80\text{mm}$ or less (T80), $\text{Ø}200\text{mm}$ or less (T200)
: $\text{Ø}12\text{mm}$
:

⚠ 1. 가

2.

3. 70

4.

5.2

